(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 6 January 2005 (06.01.2005)

PCT

(10) International Publication Number WO 2005/001163 A1

(51) International Patent Classification⁷: 11/03

C25B 11/02,

(21) International Application Number:

PCT/EP2004/006791

(22) International Filing Date: 23 June 2004 (23.06.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: MI2003A001269


24 June 2003 (24.06.2003) IT

(71) Applicant (for all designated States except US): DE NORA ELETTRODI S.P.A. [IT/IT]; Via Dei Canzi, 1, I-20134 Milano (IT).

- (72) Inventors; and
- (75) Inventors/Applicants (for US only): MENEGHINI, Glovanni [IT/IT]; Via Pistoia, 11, I-20153 Milano (IT). MOJANA, Corrado [IT/IT]; Via Campogrande 66, I-23868 Valmadrera (LC) (IT).
- (74) Agent: REITSTÖTTER. KINZEBACH (Z 217); Reitstötter, Kinzebach & Partner (GbR), Patentanwälte, Sternwartstrasse 4, 81679 München (DB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

[Continued on next page]

(54) Title: EXPANDABLE ANODE FOR DIAPHRAGM CELLS

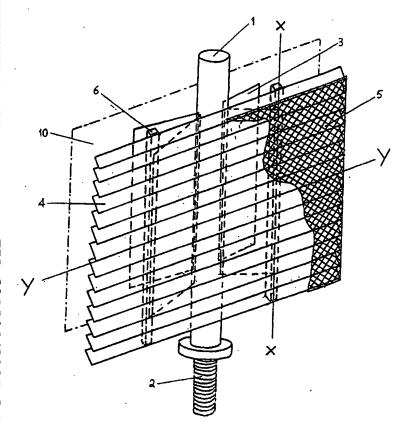

(57) Abstract: The invention describes an anodic structure for electrolysis cell provided with a separator, in particular for a diaphragm chlor-alkali electrolysis cell, consi sting of at least one movable surface suited to be put in contact with the separ ator. The movable surface comprises a component of higher thickness (4) in conta. ct with a porous layer of lower thickness (5), for instance a thin sheet provide d with openings, and is characterised by the fact that a catalytic coating is ap plied only to the porous layer of lower thickness. The component of higher thick ness has a substantially planar development and includes elements capable of pro moting the local recirculation of electrolyte.

WO 2005/001163 A1

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

with international search report